



5000 Series Dual Inlet Bottled Water System

FOR HOME AND COMMERCIAL APPLIANCES

Flojet's 5000 Series Dual Inlet Bottled Water System is the perfect solution when a higher volume of portable water is needed.

The system simultaneously draws from two water lines, which can easily be connected to most standard 3-5 gallon (11.4 - 18.9 L) water bottles to provide fresh water for use with coffee machines, water dispensers, or for any other application where portable water is needed.

Designed for convenience, the pump shuts off when the water source is depleted. When water is restored, the pump automatically restarts. A sealed vacuum keeps water fresh and a built-in check valve prevents back flow. The pump operates quietly and automatically turns on and off when the faucet is opened and closed. The system is available in 115V and 230V applications.

Features and Benefits

- **Illuminated On/Off Switch:** Provides clear visibility in dark cabinets or hard to reach places
- **Long Life Motor:** Ensures years of reliable operation
- **Flojet Diaphragm Pump:** Provides dependable run dry capabilities, extending the life of the pump
- **Quick Disconnect Port:** Allows for easy wand replacement in seconds
- **Quiet Operation:** Equipped with noise dampening rubber feet to minimize noise pollution
- **Thermal Protection:** Prevents overheating, protecting the pump and control box from damage
- **New Ergonomic T-Shaped Wand Handle:** Allows for ease of installation and removal of wand from bottle



FLOJET
a xylem brand

5000 Series Dual Inlet Bottled Water System


FOR HOME AND COMMERCIAL APPLIANCES

Special Features


- Simultaneous draw from two bottles
- Built-in check valve to prevent back flow
- Universal seal cap fits most water containers
- Easy installation
- 20' (6.1m) 0.250" (0.5cm) OD discharge hose included
- Power Transformer AC-DC
- Quick connect ports for easy installation

Specifications

Flow Rate	0.5 GPM (1.9 LPM)
Max Pressure	40 psi (2.76 bar)
Dimensions	2.9"H x 5.1"W x 7.6"D (7.5 cm H x 13.0 cm W x 19.4 cm D)
Voltages	115 VAC, 230 VAC
Amp Draw	115 VAC, 0.4 A max 230 VAC, 0.2 A max
Cycles	50/60 Hz for AC models
Weight	4.5 lbs (2.04 kg)

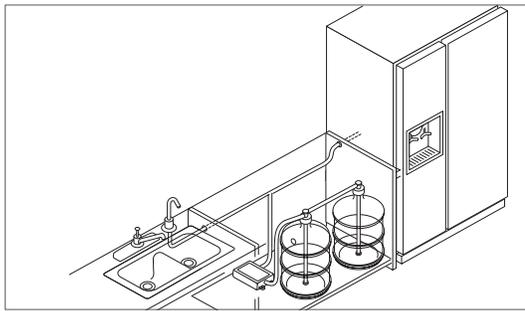

Kitchen / Refrigerator with Dual Inlet BW System

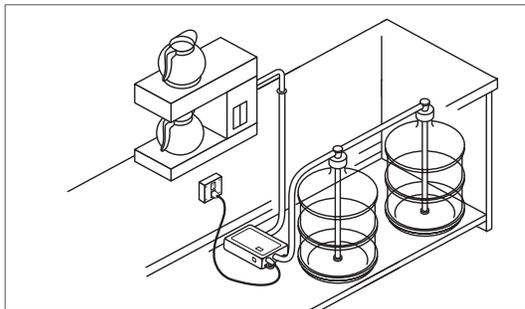

Coffee Cart / Kiosk with Dual Inlet BW System

Model Number	Voltage	Power Adaptor Type	Certification
BW5020-000A	115 VAC	US Plug	UL NSF
BW5022-00A	230 VAC	AU Plug	NSF
BW5023-000A	230 VAC	UK Plug	CE NSF
BW5024-000A	230 VAC	EU Plug	CE NSF



Warranty: All products of the company are sold and all services of the company are offered subject to the company's warranty and terms and conditions of sale, copies of which will be furnished upon request. The information provided herein is for guidance only, it does not constitute a guarantee of the performance or specification of any individual product or component.

www.xyleminc.com

USA
Xylem Inc.
100 Cummings Center Drive
Suite 535-N, Beverly, MA 01915
Tel: +1 978 281-0440
Fax: +1 978 283-2619

UK
Xylem Inc.
Patrick Gregory Road,
West Midlands, WV11 3DZ, UK
Tel: +44 (0) 1902-305678
Fax: +44 (0) 1902-305676

GERMANY
Xylem Inc.
Oststrasse 28
22844 Norderstedt
Tel: +49-40-53 53 73-0
Fax: +49-40-53 53 73-11

ITALY
Xylem Inc.
Via Tommaseo, 6
20059 Vimercate, Milano
Tel: +39 039 685 2323
Fax: +39 039 666 307